



Application

- Pumping for drilling, well, tank
- For domestic (watering, irrigation) or industrial applications


Pompe

- Maximum liquid temperature: +35°C
- Maximum sand content: 0,25%
- Maximum immersion depth: 80 m
- Minimum borehole diameter: 3"
- Curved tolerance in accordance with the standard ISO 9906

Moteur

- Rewindable motor

Identification codes

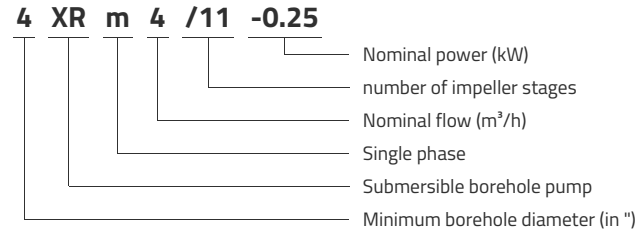

Technical data

MODEL	kW	Q (m ³ /h)	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6
		Q (l/min)	0	10	20	30	40	50	60	70	80	90	100
4XRm4/6-0.37	0.37	44	42	41	40	39	36	33	29	24	19	14	
4XRm4/10-0.75	0.75	73	70	69	67	65	61	55	48	41	32	23	
4XRm4/8-0.55	0.55	58	56	55	54	52	49	44	39	33	26	18	
4XR4/10-0.75	0.75	73	70	69	67	65	61	55	48	41	32	23	
4XRm4/14-1.1	1.1	102	98	96	94	91	85	77	68	57	45	32	
4XR4/14-1.1	1.1	102	98	96	94	91	85	77	68	57	45	32	
4XRm4/18-1.5	1.5	131	127	124	121	117	109	99	87	73	58	41	
4XR4/18-1.5	1.5	131	127	124	121	117	109	99	87	73	58	41	
4XRm4/24-2.2	2.2	174	169	165	161	156	146	132	116	98	77	55	
4XR4/24-2.2	2.2	174	169	165	161	156	146	132	116	98	77	55	
4XR4/32-3	3	232	225	220	215	208	195	176	155	130	103	73	
4XR4/40-4	3	290	281	275	268	260	243	220	194	163	128	92	
4XR4/50-5.5	5.5	363	352	344	335	325	304	275	242	203	160	115	
4XR4/6-0.37	0.37	44	42	41	40	39	36	33	29	24	19	14	
4XR4/62-7.5	7.5	450	436	426	416	403	377	341	300	252	199	142	
4XR4/8-0.55	0.55	58	56	55	54	52	49	44	39	33	26	18	

Dimensions

MODEL	DN1	DN2	P	M	T	poidsP	poidsM	poidsT
4XRm4/6-0.37	1½	1½	396	314	710	3.2	6.7	9.9
4XRm4/10-0.75	1½	1½	513	359	872	4.3	8.7	13
4XRm4/8-0.55	1½	1½	454	329	783	3.7	6.3	11
4XR4/10-0.75	1½	1½	513	344	857	4.3	8	12.3
4XRm4/14-1.1	1½	1½	630	399	1029	5.3	10.6	15.9
4XR4/14-1.1	1½	1½	630	379	1009	5.3	9.8	15.1
4XRm4/18-1.5	1½	1½	778	449	1227	6.4	12.9	19.3
4XR4/18-1.5	1½	1½	778	424	1202	6.4	11.7	18.1
4XRm4/24-2.2	1½	1½	953	542	1495	8.1	17.7	25.8
4XR4/24-2.2	1½	1½	953	514	1467	8.1	15.7	23.8
4XR4/32-3	1½	1½	1187	594	1781	10.2	19.8	30
4XR4/40-4	1½	1½	1452	698	2150	12.4	23.7	36.1
4XR4/50-5.5	1½	1½	1744	788	2532	15.1	28	43.1
4XR4/6-0.37	1½	1½	396	314	710	3.2	6.7	9.9
4XR4/62-7.5	1½	1½	2126	908	3034	18.4	34	52.4
4XR4/8-0.55	1½	1½	454	329	783	3.7	6.3	11



Application

- Pumping for drilling, well, tank
- For domestic (watering, irrigation) or industrial applications

Pompe


- Maximum liquid temperature: +35°C
- Maximum sand content: 0,25%
- Maximum immersion depth: 80 m
- Minimum borehole diameter: 3"
- Curved tolerance in accordance with the standard ISO 9906

Moteur

- Rewindable motor

Identification codes

4 XR m 8 /11 -0.25

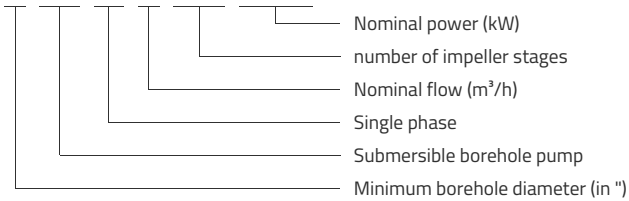

Technical data

MODEL	kW	Q (m³/h)	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8
		Q (l/min)	0	20	40	60	80	100	120	140	160	180
4XRm8/7-0.75	0.75	44	43	39	37	35	33	30	26	20	13	
4XRm8/9-1.1	1.1	57	55	51	47	45	43	39	33	26	17	
4XRm8/12-1.5	1.5	76	73	67	63	60	57	52	44	34	22	
4XR8/12-1.5	1.5	76	73	67	63	60	57	52	44	34	22	
4XRm8/17-2.2	2.2	107	104	96	90	85	81	74	63	48	31	
4XR8/17-2.2	2.2	107	104	96	90	85	81	74	63	48	31	
4XR8/23-3	3	145	141	129	121	115	109	100	85	65	42	
4XR8/29-4	4	183	177	163	153	145	138	126	107	82	53	
4XR8/37-5.5	5.5	234	226	208	195	185	176	160	136	105	68	
4XR8/45-7.5	7.5	284	275	253	237	225	214	195	166	128	83	
4XRm8/5-0.55	0.55	32	31	28	26	25	24	22	18	14	9	
4XR8/5-0.55	0.55	32	31	28	26	25	24	22	18	14	9	
4XR8/7-0.75	0.75	44	43	39	37	35	33	30	26	20	13	
4XR8/9-1.1	1.1	57	55	51	47	45	43	39	33	26	17	

Dimensions

MODEL	DN1	DN2	P	M	T	poidsP	poidsM	poidsT
4XRm8/7-0.75	1½	1½	494	359	853	3.6	8.7	12.3
4XRm8/9-1.1	1½	1½	570	399	969	4.2	10.6	14.8
4XRm8/12-1.5	1½	1½	717	449	1165	5.1	12.9	18
4XR8/12-1.5	1½	1½	717	424	1141	5.1	11.7	16.8
4XRm8/17-2.2	1½	1½	907	542	1449	6.6	17.7	24.3
4XR8/17-2.2	1½	1½	907	514	1421	6.6	15.7	22.3
4XR8/23-3	1½	1½	1136	594	1730	8.4	19.8	28.2
4XR8/29-4	1½	1½	1396	698	2094	10.1	23.7	33.8
4XR8/37-5.5	1½	1½	1701	788	2189	12.5	28	40.5
4XR8/45-7.5	1½	1½	2037	908	2945	14.9	34	48.9
4XRm8/5-0.55	1½	1½	418	329	747	3	7.3	10.3
4XR8/5-0.55	1½	1½	418	329	747	3	7.3	10.3
4XR8/7-0.75	1½	1½	494	344	838	3.6	8	11.6
4XR8/9-1.1	1½	1½	570	379	949	4.2	9.8	14