

XKJ-4S Self-priming centrifugal pump with portable stainless steel body

Application

- Transfer of clear water or other liquids chemically and physically comparable to water
- Suitable for pumping in a well, automatic garden watering, overpressure of water, etc ...


Pompe

- Stainless steel pump body
- Carrying handle
- Maximum liquid temperature: +35°C
- Maximum suction height: 8 m

Moteur

- Aluminum winding motor
- Integrated thermal protection for single-phase motors
- Insulation class: F
- Protection class: IPX4
- Maximum ambient temperature: +40°C


Identification codes

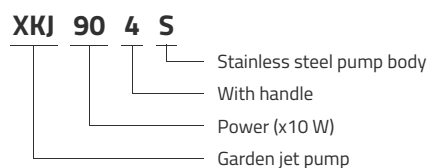

Technical data

MODEL	kW	Q (m ³ /h)									
		0	0.6	1.2	1.8	2.4	3	3.6	4.2		
		Q (l/min)									
		0	10	20	30	40	50	60	70		
XKJ-604S	0.6	30	22	17.5	14	12	9.5				
XKJ-804S	0.8	40	30.5	21.5	18.5	15.5	10.5				
XKJ-904S	0.9	40	30	24.5	19.5	16.5	13.5				
XKJ-1104S	1.1	45	37.5	32	26.5	22.5	19	15			

Dimensions

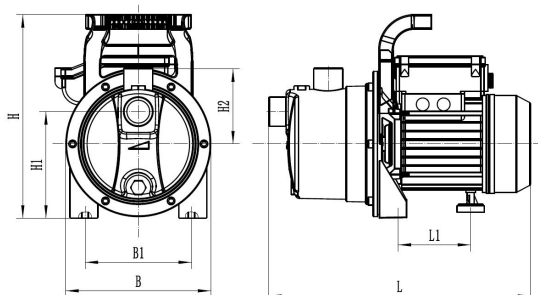

MODEL	L	B	H	L1	B1	H1	H2
XKJ-604S	318	180	246	74	140	135	90
XKJ-804S	318	180	246	74	140	135	90
XKJ-904S							
XKJ-1104S	380	200	270	127	140	160	105